

Concealed hinges

BETA 200 P8



New



200 kg



3D Regulation





Technical Specifications

- Heavy duty hinge. Designed for heavy doors.
- 3D adjustment
- Minimum door thickness 38 mm.
- Reversible
- Easy to install
- Symmetry of cut and only 32 mm deep.
- Milled up to 4mm. from the internal edge + 8 mm. of paneling.

Code	Description	Finished	Load Capacity	Set
16935	Concealed hinge REG Beta 200 P8	PL	200 Kg.	3
16936	Concealed hinge REG Beta 200 P8	NE	200 Kg.	3
16937	Concealed hinge REG Beta 200 200	BL*	200 Kg.	3
16938	Concealed hinge REG Beta 200 P8	CS*	200 Kg.	3
16939	Concealed hinge REG Beta 200 P8	ORO*	200 Kg.	3

*Finishes available on request.

Dimensions

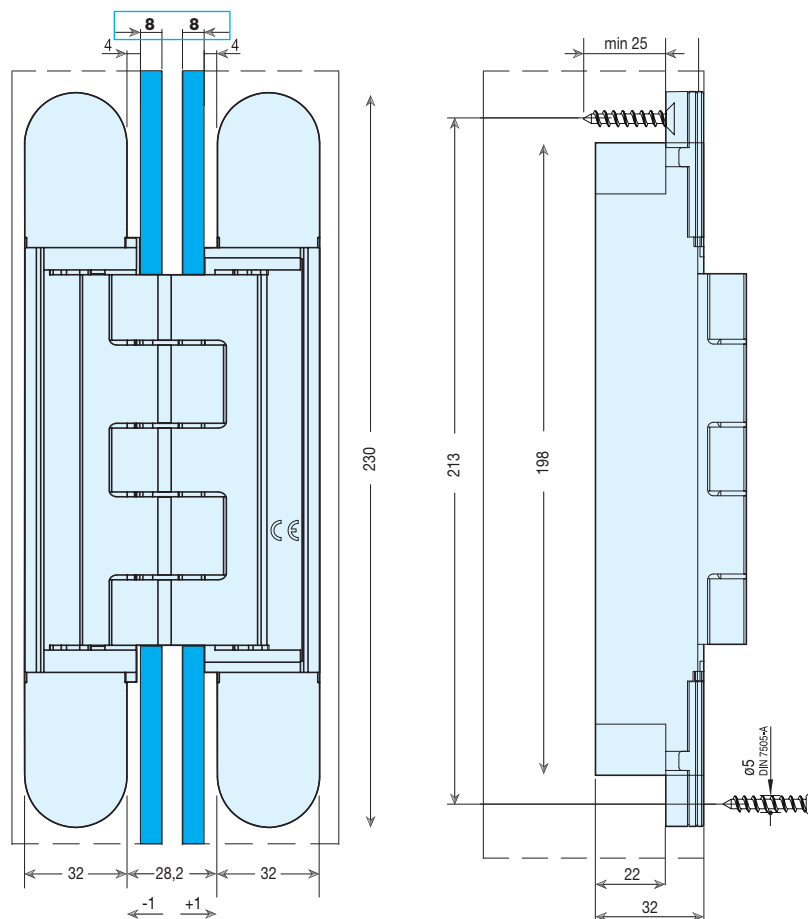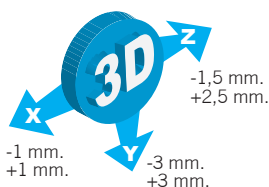


Download the product declaration of performance at www.inther.es


Concealed hinges

BETA 200 P8


Machining dimensions

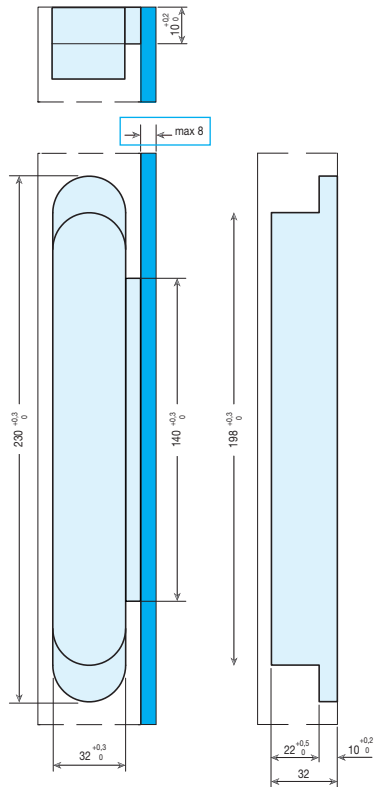

Door Section

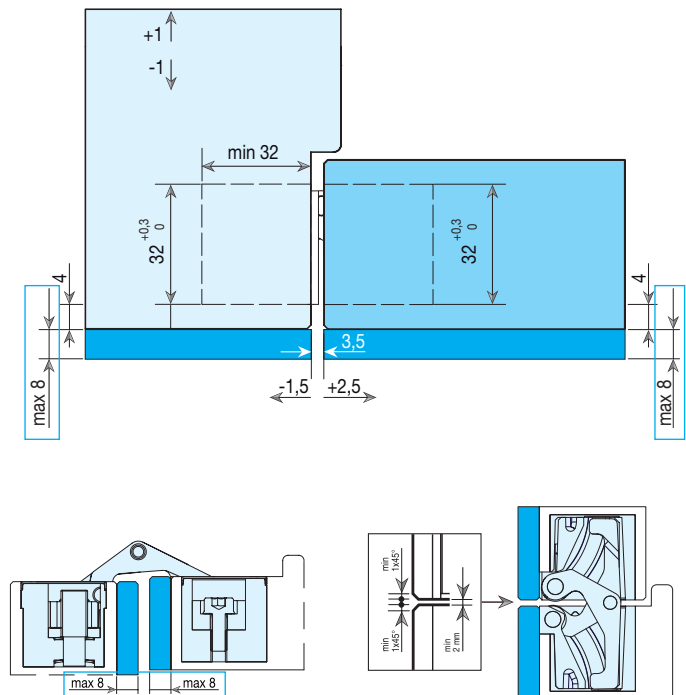

Admissible load capacity

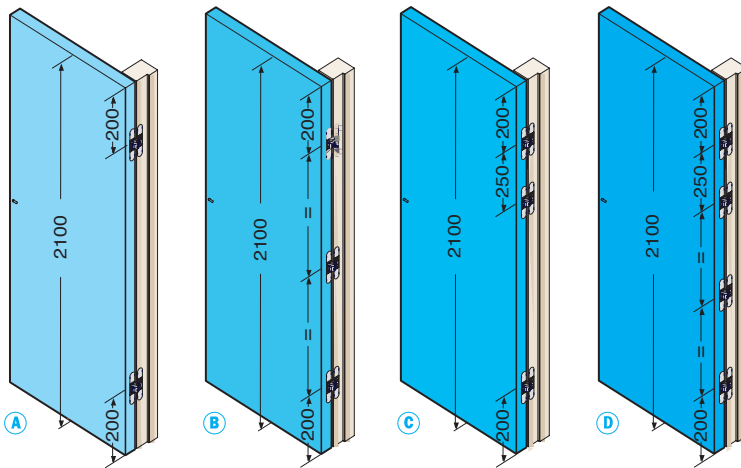

Height from 2100

ATENCIÓN

For $H > 2100$ mm or for use with door closers, please consult the technical department.

The use of door closers reduces the load capacity by 20%.

